

12+5Watt LED DOWNLIGHT DR53

Description & Features

- Unique and Innovative 2 Light Source combination
- 3 Way driver easily controlled through switches
- SMD indirect lighting ,COB direct lighting
- Fashionable appearance and smooth design
- Efficiently Lumen output: 69lm per watt
- Smart heat Dissipation

Certificate

- CE, RoHs

Warranty


- 5 Years warranty

Specifications


Model No.:	12+5Watt LED Downlight DR53
Power Consumption:	12+5W
Input Voltage:	AC100V-240V
Operate Frequency:	50-60Hz
Lumens Output:	69lm/W
Led Brand	EPISTAR (Isolated Driver)
LED Type	SMD + COB
Color Temperature:	2700K - 6500K,
CRI:	>80
Beam Angle:	75°
IP Rated:	IP 20
Power Factor:	0.512
Working Temp.:	-20°C ~ +60°C
Storage Temp.:	-20°C ~+ 80°C
Dimensions:	Φ 150mm x 35mm
Hole Cut	Φ 130mm
Life span L70(H):	>50,000 Hours




Instructions:



STEP 1: Cut a hole into the ceiling as mentioned in the above table.

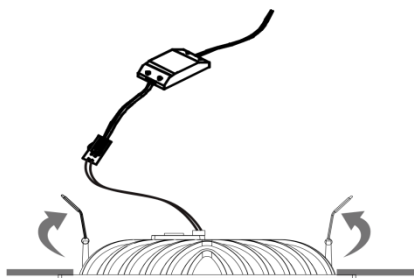



STEP 2: Connect driver to AC power then Connect the panel with DC input plug, and push that two spring fastener to uprightness.

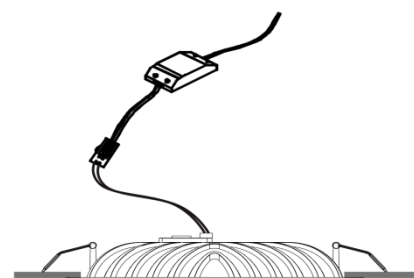

STEP 3: Push the LED panel light together with the spring fastener into the hole.


Luminous Intensity Distribution Curve

Illuminance at a Distance

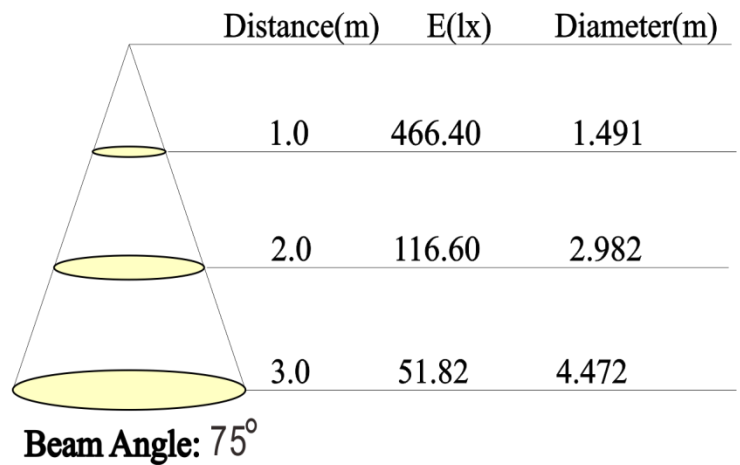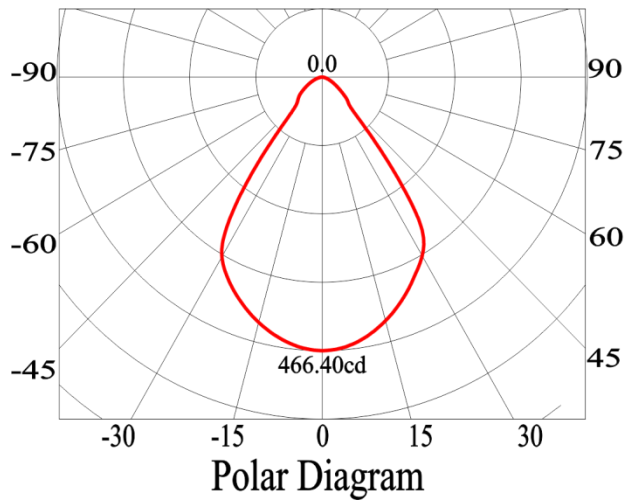

Dimensions: $\Phi 150\text{mm} \times 35\text{mm}$

Hole cut: $\Phi 130\text{mm}$

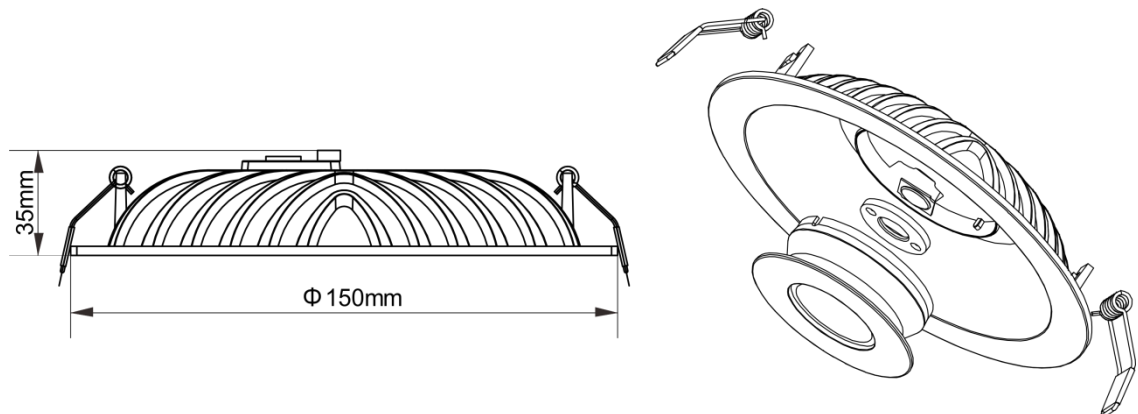

Warranty Policy

- Standard 5 years after purchase under normal usage